



Article I2005

Definition: M2 KNOTLESS NETTING PPM 5 MM M45x45
MM

Uses: Safety net industrial use En1263-1 standard
System: Knotless nets Polypropylene Multifilament

Mesh Configuration: Sqaure Q

Breaking strenght: **2500 N**
Weight: / m²: 560g

Thickness 5mm

Mesh Size:
45 mm

Row material: Polypropylene Multifilament high tenacity (PPM). 300 Kilolanglys.

HIGH TENACITY POLYPROPYLENE: A MATERIAL WITH HIGH BENEFITS.

Ecological product. Recyclable 100%.

Good thermic insulate.

Specific weight 0,91, less than water.

100% inert, does not produce bacterium.

Antialergic.

Do not retain static electricity.

Not digestible by insects.


Fibber not absorbent resistant to dirt.

Protected against the action of U.V. rays.

Resistant to abrassion.

Good thermicinsulate.

Resistant to acids. Except boiling xilene.

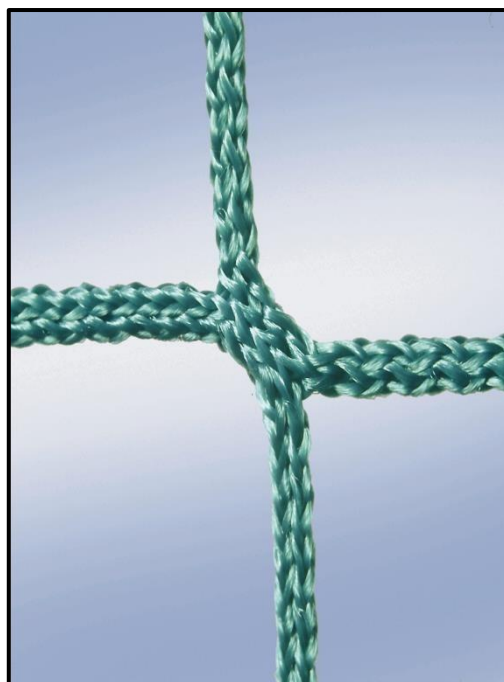

- Net Knotless PPM 5mm mesh 45

Maintains tenacity in humid and alkaline environm ents

Adress

Industrinät Nordiska Nätlösningar AB
Möbelgatan 4
43133 Mölndal

Telefon

+46317884512
+46760001382

E-post/Webbplats

info@industrinat.se
www.industrinat.se

Organisationsnr

556886-5835
Godkänd för F-skatt

Momsreg.nr

SE 55688658350